

## IMPORTANT SAFEGUARDS

When using electrical equipment, basic safety precautions should always be followed including the following:

### READ AND FOLLOW ALL SAFETY INSTRUCTIONS

1. To reduce the risk of electrical shock, turn off power supply before installation or servicing.
2. This luminaire must be installed in accordance with the NEC or your local electrical code. If you are not familiar with these codes and requirements, consult a qualified electrician.
3. Verify the availability of necessary tools and incidental material.

### CAUTION

Silicone all plugs and unused conduit entries for weather proof sealing.

## FOR HOOK MOUNTING(Fig 1)

### STEP 1:

Slide hook into securely mounted customer supplied eye hanger. Ensure fixing method is strong enough to sustain the weight of the fitting. Return the screw to the hook .

### STEP 2:


Use steel rope for supplemental support while installing the fixture.

### STEP 3:

Strain relief is required for electrical connections. Install a suitable Listed cord strain relief bushing in the junction box and feed the luminaire supply cord through it or tie an overhand knot in the cord in the junction box.

### STEP 4:

Make supply connections per "Electrical Connections" section.

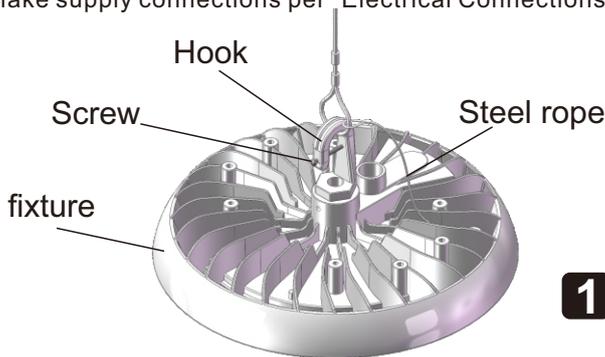

**1**

## FOR PENDANT MOUNTING(Fig 2)

### (3/4" NPS Pendant Stem not supplied)

#### STEP 1:

Choose pendant length and feed Cord through pendant stems.

#### STEP 2:

For wet locations wrap threads on pendant stems with teflon tape and silicone gel. Screw the pendant stem to the housing. Tighten set screw.

#### STEP 3:


Strain relief is required for electrical connections. Install a suitable Listed cord strain relief bushing in the junction box and feed the luminaire supply cord through it or tie an overhand knot in the cord in the junction box.

#### STEP 4:

Connect supply wires to fixture wires inside a junction box using approved wire connectors.

#### STEP 5:

Install luminaire and pendant to mounting surface referencing the Pendant Mounting Kit installation sheet.

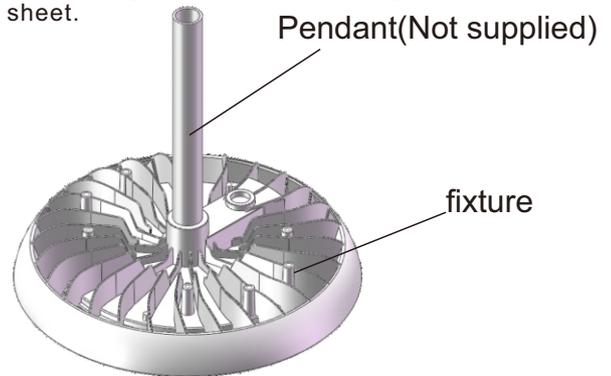

**2**

Model	Weight(KG)	Model	Weight(KG)
UF101D	3	UF104D	3.77
UF102D	3.05	UF105D	6.12
UF103D	3.58	UF106D	6.12

## FOR SURFACE MOUNTING (Fig 3)

### STEP 1:

Use customer supplied 5/16" self-tapping screws(not supplied) to secure the bracket to the mounting surface.

### STEP 2:

Loosen the pivot bolts & angle locking screw. Adjust fixture to desired angle. Tighten pivot bolts & angle locking screw.

### STEP 3:


Strain relief is required for electrical connections. Install a suitable Listed cord strain relief bushing in the junction box and feed the luminaire supply cord through it or tie an overhand knot in the cord in the junction box.

### STEP 4:

Connect wiring to customer supplied junction box.

### STEP 5:

Use steel rope for supplemental support of the fixture.

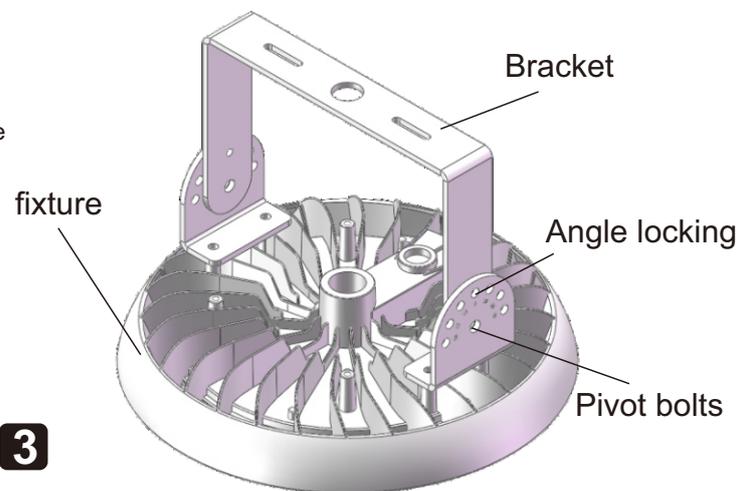

**3**

#### Make the following Electrical Connections:

1. For 120/277V connect the black fixture lead to the Line supply lead .
2. For 120/277V connect the white fixture lead to the common supply lead .
3. Connect the green or green/yellow ground lead to the green wire position of the supply ground.
4. If Dimming is an option; connect the violet dimming positive lead to the supply dimming positive lead.
5. If Dimming is an option; connect the grey dimming negative lead to the supply dimming negative lead

